

PS-3400 Series

Regulators - Pressure Reducing

DPS341793X012

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

3000 psig / 207 bar

Outlet Pressure Ranges

0-25, 0-50, 0-100 and 0-150 psig
0-1.7, 0-3.4, 0-6.9 and 0-10.3 bar

Design Proof Pressure

150% maximum rated

Leakage

Internal: Bubble-tight

External: Design to meet $< 2 \times 10^{-8}$ atm cc/sec He

Operating Temperature

-40°F to 140°F / -40°C to 60°C

Flow Capacity

$C_v = 0.05$

Maximum Operating Torque

30 inch-lbs / 3.4 N•m

Decaying Inlet Characteristic

0.06 change / 100 psig inlet
0.004 change / 6.9 bar inlet

MEDIA CONTACT MATERIALS

Body

316 Stainless Steel

Bonnet

316 Stainless Steel

Diaphragm

316 Stainless Steel

Seat

CTFE (1st stage), PFA (2nd stage)

Friction Sleeves

Outer: 316 Stainless Steel

Inner: PTFE

Remaining Parts

316 Stainless Steel

OTHER

Connections

1/4" NPTF

Cleaning

CGA 4.1 and ASTM G93

Weight (without gauges)

3 lbs / 1.4 kg



TESCOM PS-3400 Series is a compact high purity two-stage cylinder regulator with tied diaphragms for low flows of toxic, flammable and pyrophoric gases. Diffusion-resistant metal diaphragm seal ensures gas purity and integrity.


Application

- For toxic, corrosive and pyrophoric cylinder gases

Features and Benefits

- Excellent decaying inlet characteristic: 0.06/100 psig or 0.004/6.9 bar inlet change
- Positive seal design
- Captured bonnet ports
- Both diaphragms are convoluted for greater accuracy and sensitivity
- Metal-to-metal diaphragm to body seal to minimize diffusion
- Diaphragm-to-valve link enhances seat sealing integrity


PS-3400 Series Regulator Drawing

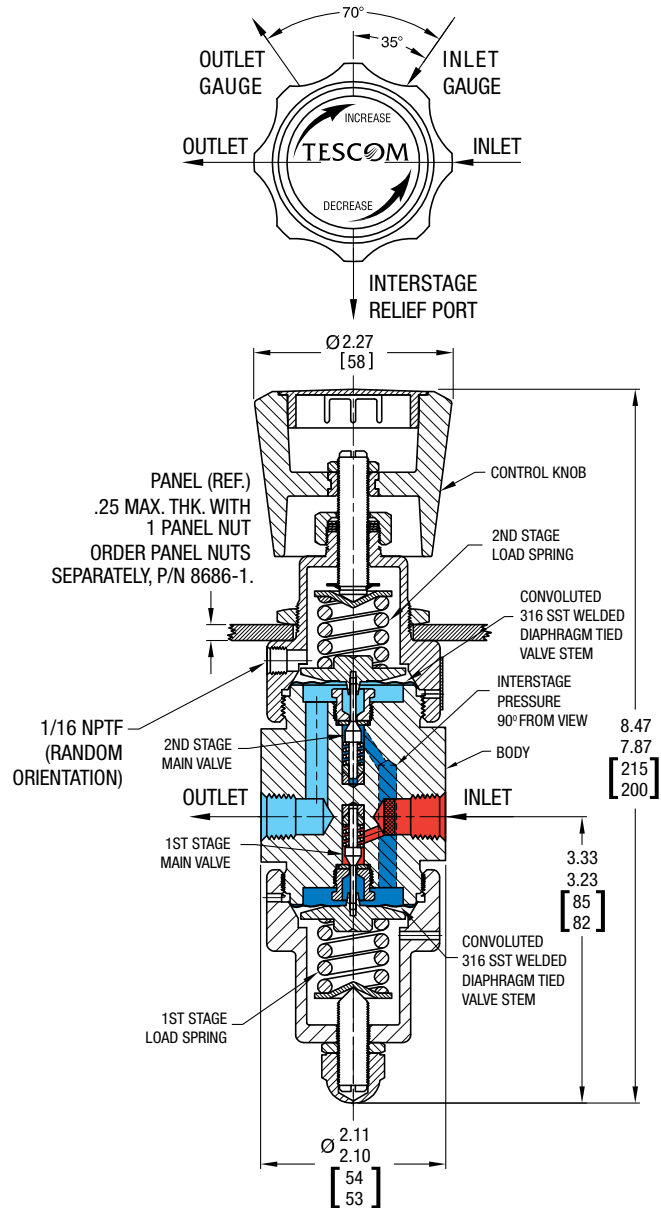

All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets

PS-3400 Series Regulator Flow Chart

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.

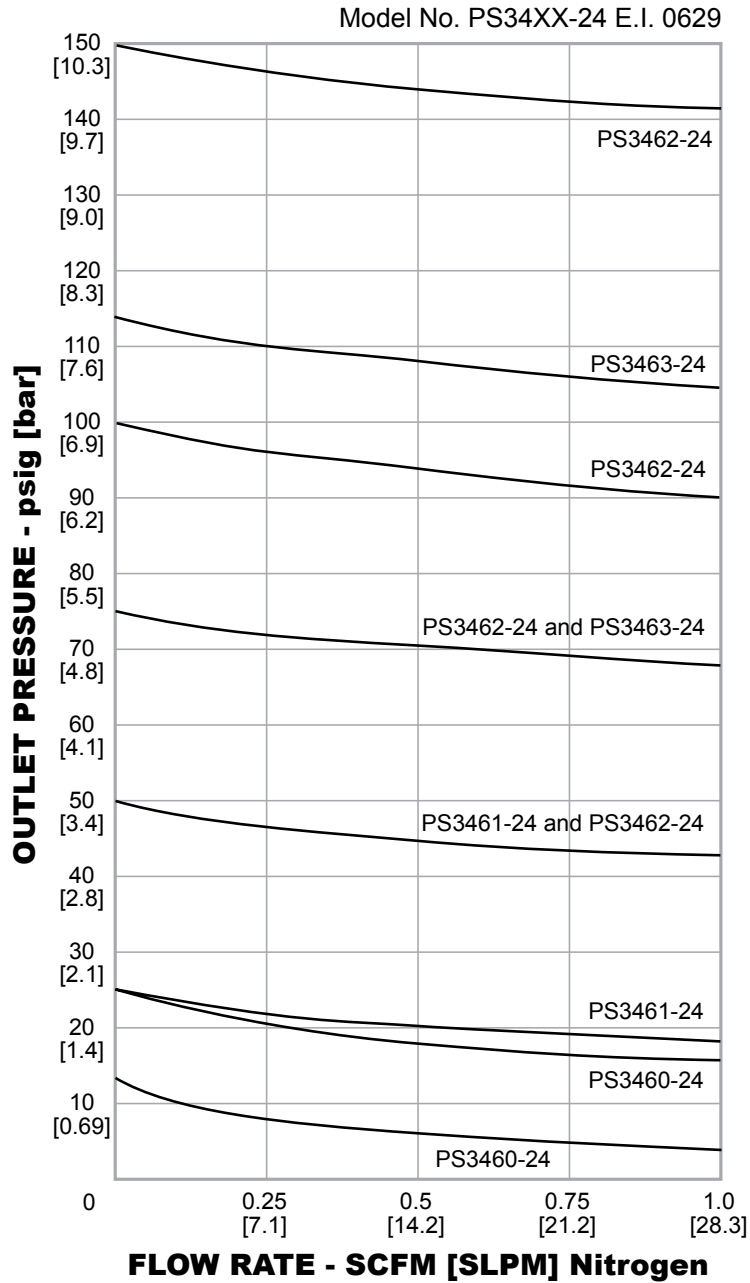

PS-3400 Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

PS34	6	0	-	2	4
BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE RANGES		INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE
PS34	6 – 316 Stainless Steel	0 – 0-25 psig 0-1.7 bar 1 – 0-50 psig 0-3.4 bar 2 – 0-100 psig 0-6.9 bar 3 – 0-150 psig 0-10.3 bar		2 – NPTF	4 – 1/4"



WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the *TESCOM Safety, Installation and Operation Precautions*.

DPS341793X012 © 2012 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 05/2012.
 Tescom, Emerson Process Management, and the Emerson Process Management design are marks of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.